



Figure similar

!!! product phase-out !!! The preferred successor type is 3UG5616-1CR20 phase sequence phase failure 3x160-690 V screw digital monitoring relay for 3-phase supply voltage connectable phase sequence phase failure 3 x 160 to 690 V 50 to 60 Hz AC undervoltage and overvoltage 160-690 V hysteresis 1-20 V 0-20 s each for Umin and Umax 1 CO for Umin 1 CO for Umax screw terminal

|  |  |
|--|--|
| product brand name   | SIRIUS   |
| product designation  | Network monitoring relay with digital setting                          |
| design of the product  | 5 functions  |
| product type designation   | 3UG4   |
| <b>General technical data</b>  |  |
| product function   | Phase monitoring relay   |
| display version LED  | No   |
| design of the display  | LCD  |
| insulation voltage for overvoltage category III according to IEC 60664 |  |
| • with degree of pollution 3 rated value                               | 690 V  |
| degree of pollution  | 3  |
| type of voltage  |  |
| • for monitoring   | AC   |
| • of the control supply voltage  | AC   |
| surge voltage resistance rated value                                   | 6 kV   |
| protection class IP  | IP20   |
| shock resistance according to IEC 60068-2-27                           | sinusoidal half-wave 15g / 11 ms                                       |
| vibration resistance according to IEC 60068-2-6                        | 1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g                                    |
| mechanical service life (operating cycles) typical                     | 10 000 000   |
| electrical endurance (operating cycles) at AC-15 at 230 V typical      | 100 000  |
| thermal current of the switching element with contacts maximum         | 5 A  |
| reference code according to IEC 81346-2                                | K  |
| relative repeat accuracy   | 1 %  |
| Substance Prohibitance (Date)  | 05/01/2012   |
| SVHC substance name  | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8             |
| Weight   | 0.147 kg   |
| <b>Product Function</b>  |  |
| product function   |  |
| • undervoltage detection   | Yes  |
| • overvoltage detection  | Yes  |
| • phase sequence recognition   | Yes  |
| • phase failure detection  | Yes  |
| • asymmetry detection  | Yes; not adjustable, indirectly by monitoring the voltage limit values |
| • overvoltage detection 3 phase  | Yes  |
| • undervoltage detection 3 phases                                      | Yes  |
| • voltage window recognition 3 phase                                   | Yes  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>adjustable open/closed-circuit current principle</li> <li>auto-RESET</li> </ul>  | <p>Yes</p> <p>Yes</p>  |
| <b>Control circuit/ Control</b>   |  |
| <b>control supply voltage at AC</b>   |  |
| <ul style="list-style-type: none"> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> </ul>  | <p>160 ... 690 V</p> <p>160 ... 690 V</p>                            |
| <b>operating range factor control supply voltage rated value at AC at 50 Hz</b>   |  |
| <ul style="list-style-type: none"> <li>initial value</li> <li>full-scale value</li> </ul>   | <p>1</p> <p>1</p>  |
| <b>operating range factor control supply voltage rated value at AC at 60 Hz</b>   |  |
| <ul style="list-style-type: none"> <li>initial value</li> <li>full-scale value</li> </ul>   | <p>1</p> <p>1</p>  |
| <b>Measuring circuit</b>  |  |
| <b>measurable voltage at AC</b>   | 160 ... 690 V  |
| <b>adjustable response delay time</b>   |  |
| <ul style="list-style-type: none"> <li>with lower or upper limit violation</li> </ul>   | 0.1 ... 20 s   |
| <b>response time maximum</b>  | 450 ms   |
| <b>accuracy of digital display</b>  | +/-1 digit   |
| <b>Precision</b>  |  |
| <b>relative metering precision</b>  | 5 %  |
| <b>Auxiliary circuit</b>  |  |
| number of NC contacts delayed switching   | 0  |
| number of NO contacts delayed switching   | 0  |
| <b>number of CO contacts</b>  |  |
| <ul style="list-style-type: none"> <li>for auxiliary contacts</li> <li>delayed switching</li> </ul>   | <p>2</p> <p>2</p>  |
| <b>operating frequency with 3RT2 contactor maximum</b>  | 5 000 1/h  |
| <b>Main circuit</b>   |  |
| <b>number of poles for main current circuit</b>   | 3  |
| <b>ampacity of the output relay at AC-15</b>  |  |
| <ul style="list-style-type: none"> <li>at 250 V at 50/60 Hz</li> <li>at 400 V at 50/60 Hz</li> </ul>  | <p>3 A</p> <p>3 A</p>  |
| <b>ampacity of the output relay at DC-13</b>  |  |
| <ul style="list-style-type: none"> <li>at 24 V</li> <li>at 125 V</li> <li>at 250 V</li> </ul>   | <p>1 A</p> <p>0.2 A</p> <p>0.1 A</p>                                 |
| <b>operational current at 17 V minimum</b>  | 5 mA   |
| <b>continuous current of the DIAZED fuse link of the output relay</b>   | 4 A  |
| <b>Electromagnetic compatibility</b>  |  |
| <b>conducted interference</b>   |  |
| <ul style="list-style-type: none"> <li>due to burst according to IEC 61000-4-4</li> <li>due to conductor-earth surge according to IEC 61000-4-5</li> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul> | <p>2 kV</p> <p>2 kV</p> <p>1 kV</p>                                  |
| <b>field-based interference according to IEC 61000-4-3</b>  | 10 V/m   |
| <b>electrostatic discharge according to IEC 61000-4-2</b>   | 6 kV contact discharge / 8 kV air discharge                          |
| <b>Galvanic isolation</b>   |  |
| <b>galvanic isolation</b>   |  |
| <ul style="list-style-type: none"> <li>between input and output</li> <li>between the outputs</li> <li>between the voltage supply and other circuits</li> </ul>  | <p>Yes</p> <p>Yes</p> <p>Yes</p>                                     |
| <b>Electrical Safety</b>  |  |
| <b>protection class IP on the front according to IEC 60529</b>  | IP20   |
| <b>Connections/ Terminals</b>   |  |
| <b>product component removable terminal for auxiliary and control circuit</b>   | Yes  |
| <b>type of electrical connection</b>  | screw terminal   |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>solid</li> </ul>   | 1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>finely stranded with core end processing</li> <li>for AWG cables solid</li> <li>for AWG cables stranded</li> </ul> | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (20 ... 14)<br>2x (20 ... 14) |
| <b>connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> </ul>      | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"> <li>solid</li> <li>stranded</li> </ul>                  | 20 ... 14<br>20 ... 14   |
| tightening torque with screw-type terminals   | 0.8 ... 1.2 N·m  |

**Installation/ mounting/ dimensions**

|   |                  |
|---|------------------|
| <b>mounting position</b>  | any              |
| <b>fastening method</b>   | snap-on mounting |
| <b>height</b>   | 92 mm            |
| <b>width</b>  | 22.5 mm          |
| <b>depth</b>  | 91 mm            |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>with side-by-side mounting               <ul style="list-style-type: none"> <li>forwards 0 mm</li> <li>backwards 0 mm</li> <li>upwards 0 mm</li> <li>downwards 0 mm</li> <li>at the side 0 mm</li> </ul> </li> <li>for grounded parts               <ul style="list-style-type: none"> <li>forwards 0 mm</li> <li>backwards 0 mm</li> <li>upwards 0 mm</li> <li>at the side 0 mm</li> <li>downwards 0 mm</li> </ul> </li> <li>for live parts               <ul style="list-style-type: none"> <li>forwards 0 mm</li> <li>backwards 0 mm</li> <li>upwards 0 mm</li> <li>downwards 0 mm</li> <li>at the side 0 mm</li> </ul> </li> </ul> |                  |

**Ambient conditions**

|  |         |
|--|---------|
| installation altitude at height above sea level maximum  | 2 000 m |
| <b>ambient temperature</b> <ul style="list-style-type: none"> <li>during operation -25 ... +60 °C</li> <li>during storage -40 ... +85 °C</li> <li>during transport -40 ... +85 °C</li> </ul> |         |

**Approvals Certificates**

**General Product Approval**



[Confirmation](#)



**EMV Test Certificates Marine / Shipping**



[KC](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



**other Railway Environment**



## Further information

## Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

## Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

## Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4615-1CR20>

## Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4615-1CR20>

## Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UG4615-1CR20>

## Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG4615-1CR20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4615-1CR20&lang=en)

## Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4615-1CR20/manual>

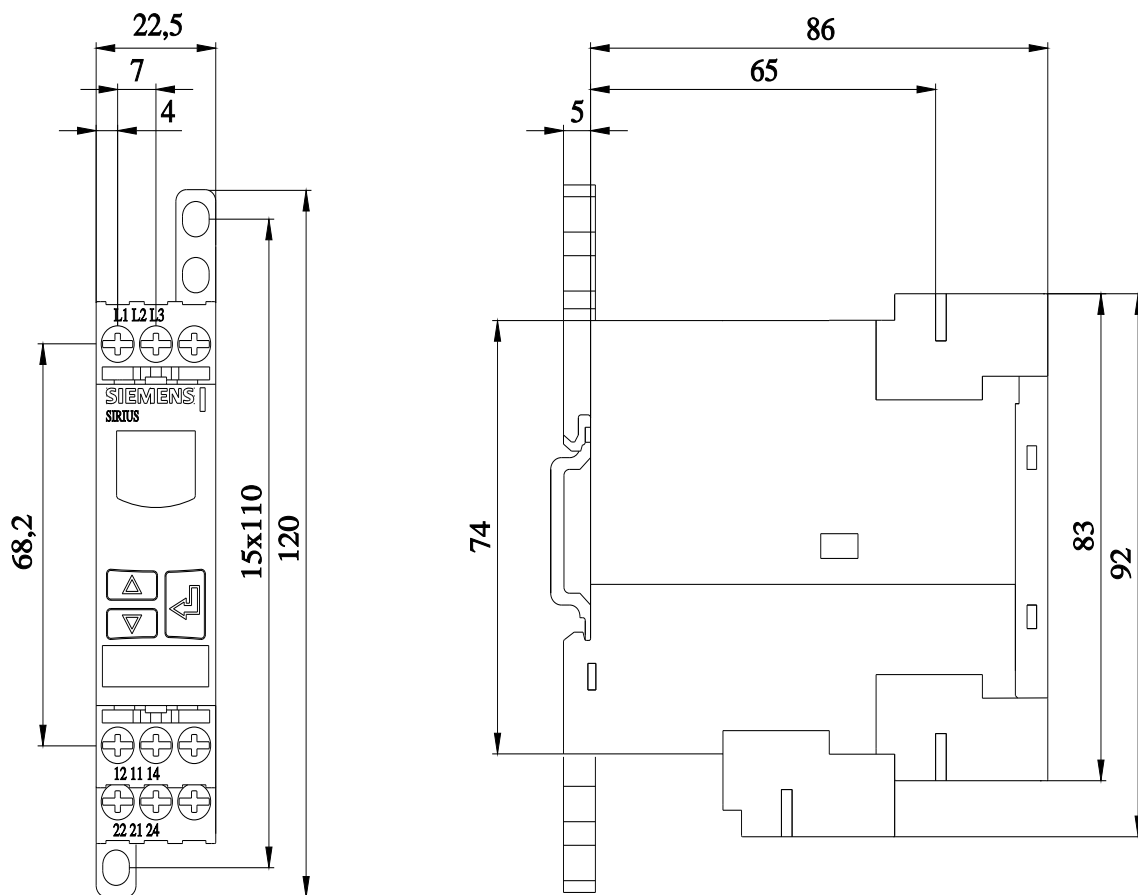

last modified:

4/8/2024